
ON THE STATIC AND DYNAMIC CHARACTERISTICS OF THE SHOCK INSULATORS EQUIPPING RAILWAY VEHICLES

■ **Abstract:**

The paper presents theoretical notions regarding the shock due to collisions of railway vehicles as well as a study on the applied methodology used to experimentally determine the static and dynamic characteristics of the bumpers that equip railway vehicles. The experimental stand, the transducers, the measurement, recording and data processing apparatus are also presented.

The experimental force as a function of displacement (contraction) diagrams are presented for the shock insulators as well as the characteristics obtained during the static testing, both for normal temperature and extreme temperatures (+50°C and -40°C). Furthermore, the paper contains a study on the dynamic characteristics obtained for collision velocities between 6,15 km/h and 14,7 km/h with the appropriate conclusions regarding the category of classification of the elastic element that equips the studied bumpers (shock insulators) in order to categorize them in one of the A, B or C categories according to the international norms of the European railways, UIC 526-1.

■ **Keywords:**

shock insulators, static characteristics, dynamic characteristics

■ **EXPERIMENTAL DETERMINATIONS**

The testing for shock insulators [6], [8], [9], [10], [11] was conducted according to the prescription of the UIC 526-1 document. From the testing program presented in UIC 526 - 1 file the following tests were conducted:

1. Testing in order to determine the static characteristics;
2. Testing in order to determine the static characteristics at extreme temperatures - 40°C and +50°C;

Testing in order to determine the dynamic characteristics.

■ **STATIC CHARACTERISTICS**

Test at +15°C. For the static test, a number of 2 shock insulators were studied (fig. 1) [4], [7]. The characteristic parameters of the category C shock insulators are imposed by the UIC 526-1 file and are the following:

- Precompression force 10 ÷ 50 KN;
- Force after 25mm compression 30 ÷ 130 KN;
- Force after 60mm compression 100 ÷ 400 KN;
- Force after 100mm compression 400 ÷ 1000 KN;
- stored energy (W_s) ≥ 12.500 J;
- absorbed energy (W_a) $\geq 0,5 W_e$.

The experimentally determined characteristic diagrams of the shock insulators are shown in figures 2 and 3.

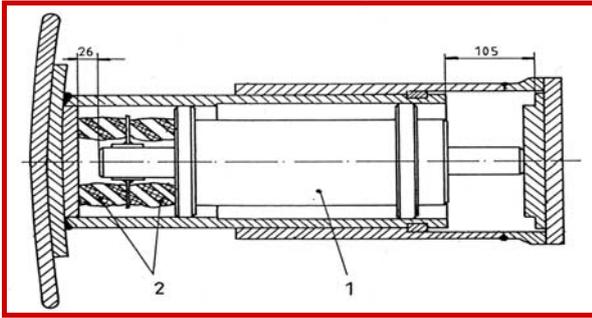


Fig.1 Shock insulator (1. Silicone dampener; 2. Rubber elastic elements)

From the analysis of the experimental results it is observed that for the two shock insulators tested, the force characteristics for the 25mm and 60mm compressions and the $\eta = \frac{W_a}{W_e}$ factor do

not fall within the limits imposed by the UIC 526-1 file, while the other characteristics fit within the prescribed limits.

Test at +50°C. The test was conducted in a sealed climate controlled chamber where the shock insulators were introduced for a period of 8 hours.

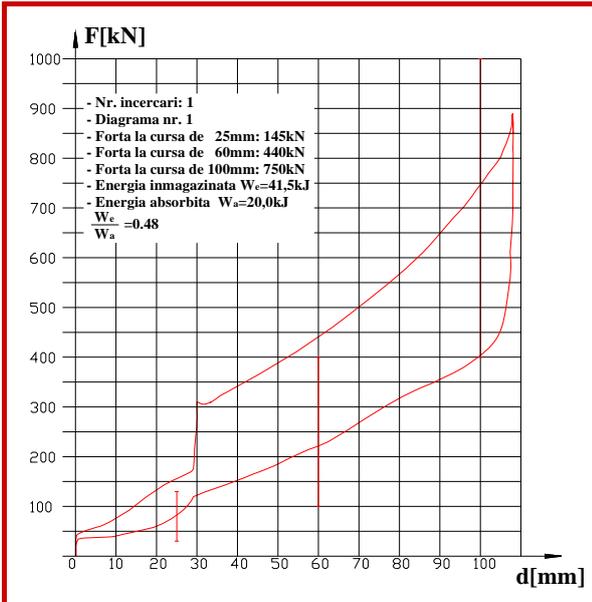


Fig. 2. Experimentally determined characteristic diagrams of the shock insulators

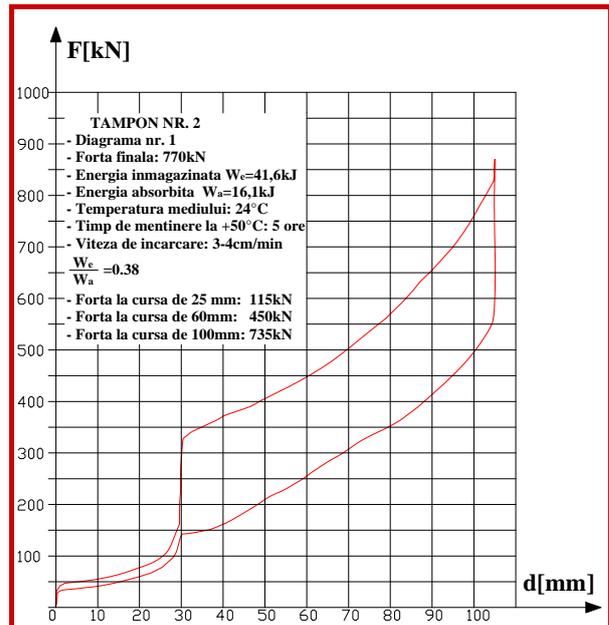


Fig. 4. Experimentally determined characteristic diagrams

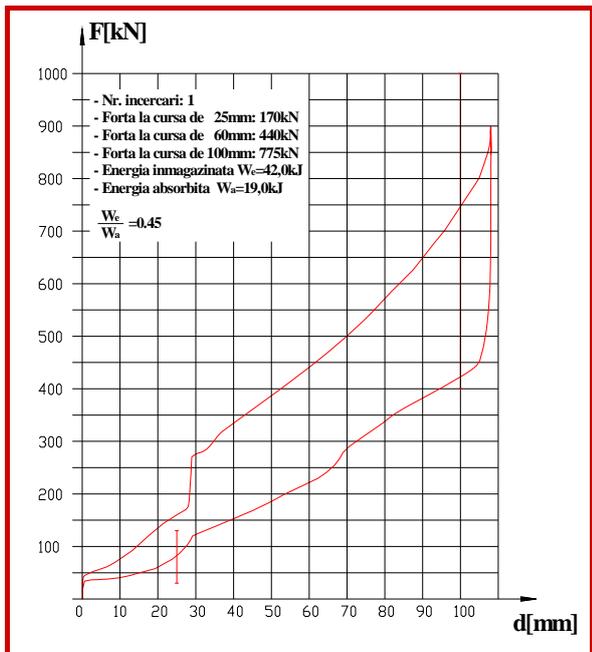


Fig. 3. Experimentally determined characteristic diagrams of the shock insulators

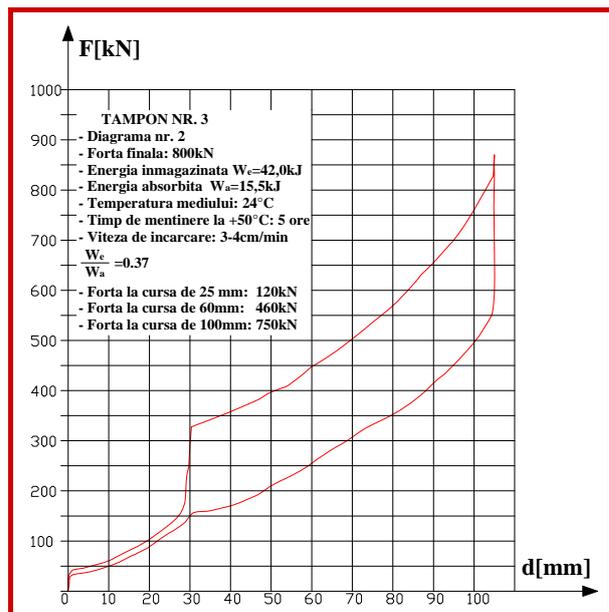


Fig. 5. Experimentally determined characteristic diagrams

The heating was done with an air heater and the temperature control was done with a thermometer.

The results of the tests with the obtained parameter values are shown in figures 4 and 5. Comparing the results from figures 2 and 4 for the first shock insulator, and from figures 3 and 5 for the second one, the following procentual differences are observed:

Shock insulator 1	Shock insulator 2
$\Delta F_{25} = 21\%$	$\Delta F_{25} = 29,4\%$
$\Delta F_{60} = 2,2\%$	$\Delta F_{60} = 4,5\%$
$\Delta F_{100} = 2\%$	$\Delta F_{100} = 3,3\%$
$\Delta W_e = 0,2\%$	$\Delta W_e = 0\%$
$\Delta W_a = 20\%$	$\Delta W_a = 19,4\%$

From the analysis of the above results it is observed that the shock insulators fit (with the exception of ΔF_{25} and the η factor) within the 20% tolerance admissible by the UIC 526-1.

Test at -40°C. In order to conduct this test, shock insulator 2 was dismantled, the elastomer capsule together with the rubber elements were inserted into feutron where they were kept at -40°C for 16 hours. After the cooling time was done, the shock insulator was reconstructed and then the experimental determinations were carried out.

The results of the tests together with the obtained parameter values are shown in fig. 6.

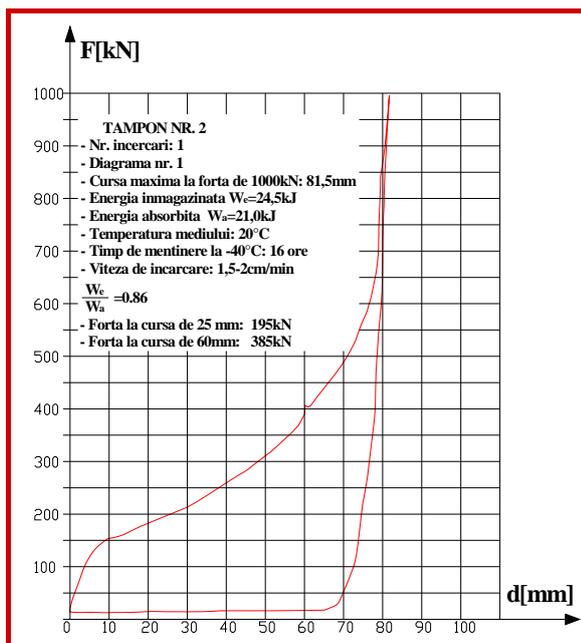


Fig. 6. Experimentally determined characteristic diagrams

Comparing the results from figures 3 and 6, the following procentual differences are observed:

- $\Delta F_{25} = 34,4\%$;
- $\Delta F_{60} = 22,5\%$;
- $\Delta W_e = 41\%$;
- $\Delta W_a = 5\%$.

From the analysis of the results it is observed that during the -40°C testing the buffer no longer complies with the requirements of UIC 526-1. Furthermore, the buffer only underwent a compression of 81mm.

COLLISION TESTING IN ORDER TO DETERMINE THE DYNAMIC CHARACTERISTICS OF THE SHOCK INSULATORS

Collision testing was conducted according to the prescriptions of UIC 526-1. The testing was done with two cars with masses of 80t (figure 7), the collided car being equipped with category C shock insulators [1], [5]. The colliding car was equipped with category A shock insulators with rubber elastic elements.

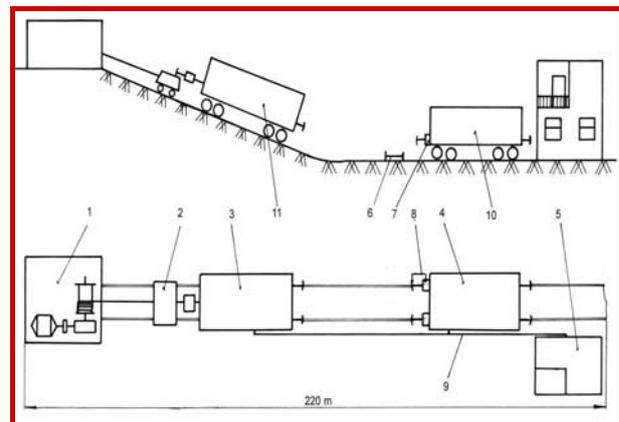


Fig. 7 Collision testing stand (1. whinch ; 2. Releasing cart ; 3. Colliding car ; 4. Collided car ; 5. Stand building ; 6. Velocity transducer ; 7. Force transducer ; 8. Displacement transducer ; 9. Connection cables ; 10. Acceleration transducers)

The transducers and the measurement apparatus used, as well as their placement are shown in fig. 8 [2]. The colliding car was launch at increasing velocities, up to 15 km/h towards the collided car. During the impact, the time evolutions of the following parameters were measured (table 1):

- force transmitted through the buffers F_1 and F_2 ;
- buffer compression D_1 and D_2 ;
- acceleration of the collided car „a”.

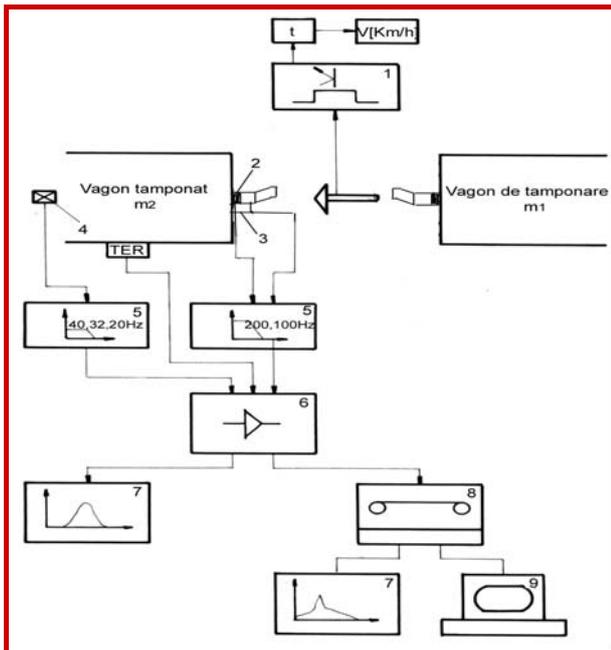


Fig. 8 Transducers, experimental data measurement, recording and analysis apparatus (1. Velocity transducer; 2. Force transducer; 3. Displacement transducer; 4. Acceleration transducer; TER. Resistive tensometric transducer; 5. Low-pass frequency filters; 6. Measurement amplifier; 7. Ultraviolet recorder; 8. Magnetic recorder; 9. Computer)

Table 1

No.	Velocity [km/h]	W_{e1} [kJ]	W_{e2} [kJ]	$W_{e\text{MEDIU}}$ [kJ]
1.	6.15	7,5	9,0	8,25
2.	8.20	18,0	13,9	15,95
3.	10.14	30,5	22,1	26,30
4.	11.84	47,7	35,4	41,55
5.	13.84	57,3	38,2	47,75
6.	14.70	61,3	42,8	52,05
No.	F_1 [MN]	F_2 [MN]	F_{MEDIU} [MN]	a (0-20Hz) [g]
1.	0,381	0,297	0,340	1,41
2.	0,559	0,348	0,454	1,79
3.	0,725	0,478	0,601	2,27
4.	1,031	0,620	0,825	3,14
5.	1,297	0,930	1,113	4,48
6.	1,514	1,059	1,286	5,31

By eliminating time from the variations of force $F = f(t)$ and compression $D = f(t)$ the diagrams $F = f(D)$ were obtained. From these diagrams, the following parameters were determined: W_e - stored energy; W_a - absorbed energy and $\eta = \frac{W_a}{W_e}$ [3].

The $F = f(D)$ diagrams are shown in figures 9 and 10.

The variations of the average stored energy of the two shock insulators were represented as a

function of the velocity of the collided car (figure 11), and of the average transmitted force through the two shock insulators (figure 12).

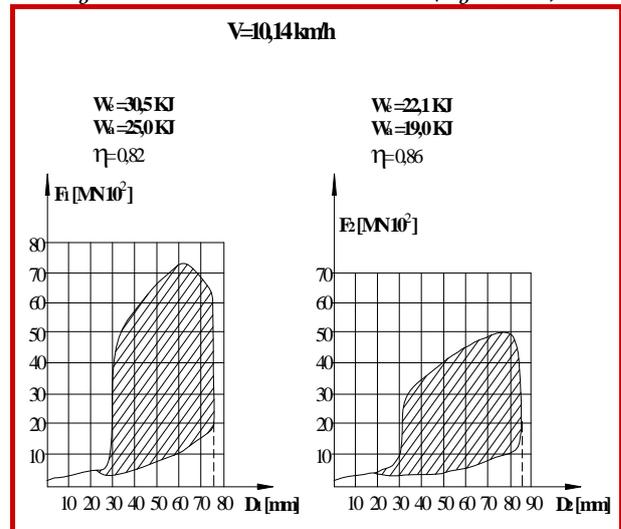


Fig. 9. The $F = f(D)$ diagram

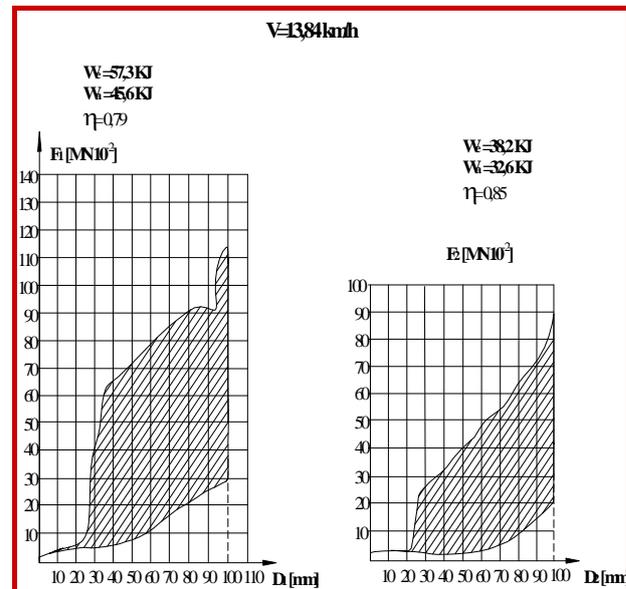


Fig. 10. The $F = f(D)$ diagram

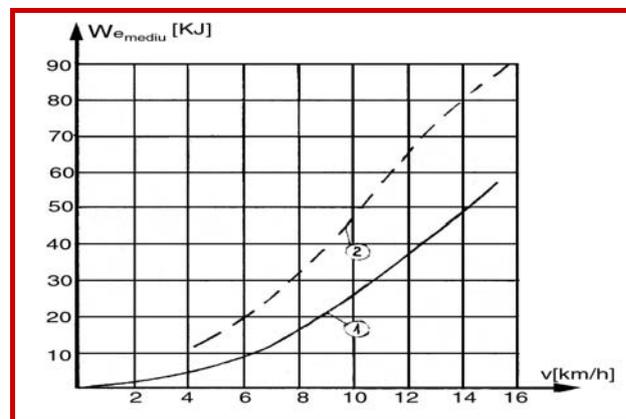


Fig. 11

1. Cat. C buffer with elastomers
2. Cat. C buffer ICPVA

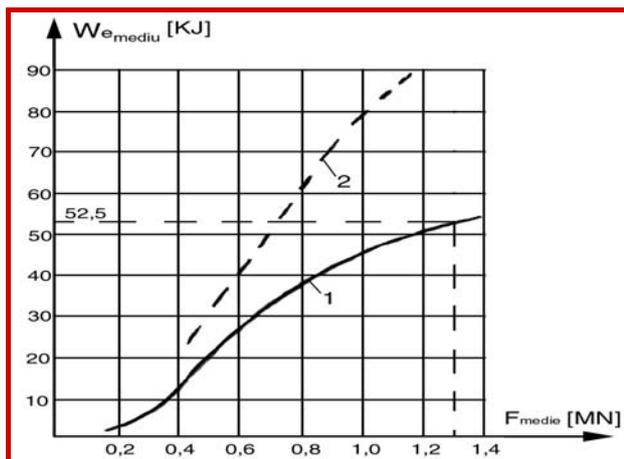


Fig. 12

1. Cat. C buffer with elastomers
2. Cat. C buffer ICPVA

According to the diagram in figure 12, the average stored energy on the two studied shock insulators, W_{e_MEDIU} , at the average force transmitted through the buffers of 1,3 MN is $W_{e_MEDIU} = 52,5$ kJ. According to the requirements of the UIC 526-1, for category C buffers it is necessary for a value in excess of 70 kJ to be reached.

CONCLUSION

After the analysis of the experimental results, the following conclusions can be drawn:

- ✚ In regard to the static characteristics, the buffers do not correspond to the requirements of the UIC 526-1, the values of the absorption coefficient η corresponding to the force at 25 mm and 60 mm does not fit within the admissible limits.
- ✚ For the extreme temperature tests, the studied buffers do not correspond to the UIC 526-1 norms. We point out that at -40°C the buffer only underwent a compression of 81 mm and it did not return to the initial displacement, by 31mm, which, in use, determines the altering of the clearance between car buffers.
- ✚ In regard to the dynamic characteristics, the tested buffers do not correspond to the requirements imposed by the UIC 526-1 for category C buffers. The buffers fit within the limits imposed by category B buffers.

In conclusion, the tested buffers correspond to the norms of category B buffers in regards to the dynamic characteristics without fulfilling the

requirements for the static characteristics at extreme temperatures.

REFERENCES

- [1.] COPACI I., *Încercări experimentale pentru vehicule feroviare*, Editura Universității "Aurel Vlaicu" Arad, 1999;
- [2.] COPACI ION, BOCÎ LIVIU SEVASTIAN, SÂRB MIHAI, *Determinarea experimentală a forței longitudinale la vehiculele feroviare echipate cu cuplă centrală*, The First International Railway Vehicles Symposium, 25-26 november 2005, Bucharest, ISBN 973-755-038-2, pag.109-112
- [3.] COPACI ION, TRIF ELEONORA, NICOLESCU C-TIN, *Aplicarea metodei tensometrice pentru calcularea forței transmise și a lucrului mecanic înmagazinat de amortizoarele de șoc în timpul tamponării*, Revista Transporturilor și Telecomunicațiilor nr.3 / 1980. Număr dedicat celui de al II-lea Simpozion Național de Tensometrie cu participare internațională. Cluj-Napoca 1980, pg. 33-39.
- [4.] COPACI ION, OLARU STELIAN, TĂNĂSOIU AURELIA, *Fatigue - Resistance and Life Span of Railway Vehicle Bearing Structures Under Random Strains/Rezistența la oboseală și durata de viață la solicitări aleatoare ale structurilor portante ale vehiculelor feroviare*, The Knowledge Based Organization, Applied Mechanics, Military Technical Systems and Technologies Conference, pag. 218-225, "Nicolae Bălcescu" Land Forces academy, Sibiu, Noiembrie 2007.
- [5.] HOANCA V., COPACI I., OTLĂCAN D., *Tampon pentru vagoanele de marfă de categoria C*, Sesiunea de Comunicări Științifice a Universității "Aurel Vlaicu", Arad 1996.
- [6.] IOAN SEBESAN, ION COPACI, *Teoria sistemelor elastice la vehiculele feroviare*, Editura Matrix Rom București – 2008.
- [7.] TĂNĂSOIU AURELIA – *Asupra rezistenței și fiabilității amortizorului ce echipează aparatul de tracțiune a vagoanelor de călători*, Sesiunea de comunicări științifice cu participare internațională „Cercetare științifică și educație în forțele aeriene”, pag. 410 – 417, AFASES – 2008 Brașov 16 – 17 mai.
- [8.] TĂNĂSOIU AURELIA, COPACI ION, *Study on the Sock caused by Collision of Railway Vehicles*, International Journal of Mechanics, ISSN 1998-4448, pag. 67-76, www.naun.org/journals/mechanics.
- [9.] TĂNĂSOIU AURELIA, COPACI ION, *Study on the Behaviour of the Self-Unloading SSDT Train Upon the Shock Caused by Collisions*, WSEAS

Conferences, Computer and Simulation in Modern Science, vol. II, ISSN 1790-5117, ISBN 978-960-474-032-1, www.wseas.org.

[10.] AURELIA TANASOIU, ION COPACI – *Study on the evolution of kinematic parameters during the shock caused by railway vehicle collision, Simpozionul Internațional "INTERPARTNER" 22-27 sept. 2008, Alusta, Crimea.*

[11.] AURELIA TANASOIU, ION COPACI – *On the shock caused by railway vehicle collision, Al XVII-lea Seminar Internațional de Științe Tehnice, "INTERPARTNER" 22-27 sept. 2008, Alushta, Crimea, Ucraina.*

■ **AUTHORS & AFFILIATION**

^{1.} AURELIA TĂNĂSOIU,

^{2.} ION COPACI

^{1, 2.} UNIVERSITY "AUREL VLAICU" ARAD, ROMANIA