

¹Milan ŠLJIVIĆ, ²Milija KRAIŠNIK, ³Jovica ILIĆ, ⁴Jelica ANIĆ

DEVELOPMENT OF SMALL BATCHES OF FUNCTIONAL PARTS USING INTEGRATION OF 3D PRINTING AND VACUUM CASTING TECHNOLOGY

^{1,3}Faculty of Mechanical Engineering, University of Banja Luka, BOSNIA & HERZEGOVINA

^{2,4}Faculty of Mechanical Engineering, University of East Sarajevo, BOSNIA & HERZEGOVINA

Abstract: In conditions of dynamic market environment there is an increasing requirement for rapid development and production of complex and functional parts from different materials. In this paper, we present the process of development and production of small batches of functional parts in the integrated system of additive and vacuum casting technology. All advantages of this integrated approach were used during the research. Data obtained from the manufacturer were used for the proper selection of materials and they relate to the value of mechanical characteristics.

Keywords: Additive Manufacturing, Vacuum casting, Functional parts, 3D Printing

INTRODUCTION

The more time spent on the product development, the more opportunities for profit are lost. It is this philosophy that drives many industries during the development of new products. Especially, as more and more often the need for rapid design, development, testing and production of the final product, i.e., a small batch of functional parts which would be expensive to develop with conventional tools and accessories as it would not be economically justifiable. Technologies of rapid prototyping and rapid tooling provide an answer to these requirements, in this particular case technology of material extrusion and technology of vacuum casting, the integration of which are used all their advantages in the production of small batch of specific gear [1].

3D PRINTING TECHNOLOGY AND ITS ROLE IN THE INTEGRATED PROCESS

The RP technique, which was used in a specific case for making master models of gear, is a 3D printer based on FDM principle (Stratasys - Dimension Elite), which plays a key role in the integrated process [2]. Of great importance is the accuracy that is achieved in this 3D printer. It is necessary to pay special attention to the positioning and orientation of the master model on the platform during the printing process. The procedure that has been necessary to obtain a master model or prototype of gear is as follows [3]:

- Product design in one of the CAD software packages,
- Conversion of CAD models in STL format that is recognized by a 3D printer,
- Transfer of STL files to the computer that controls the three-dimensional printer,
- Processing of STL files within the CatalystEX program in which all the parameters are set and adjusted according to the required model,
- Creating a three-dimensional model using additive technology and
- Further processing of created prototypes.

The layout of the gear model designed in SolidWorks software package is shown in Figure 1 and parameter adjustment within the CatalystEX, where the selection of the orientation of models, processing of layers and layout of models on a base on which printing on a "Dimension Elite" 3D printer will be performed, is shown in Figure 2.

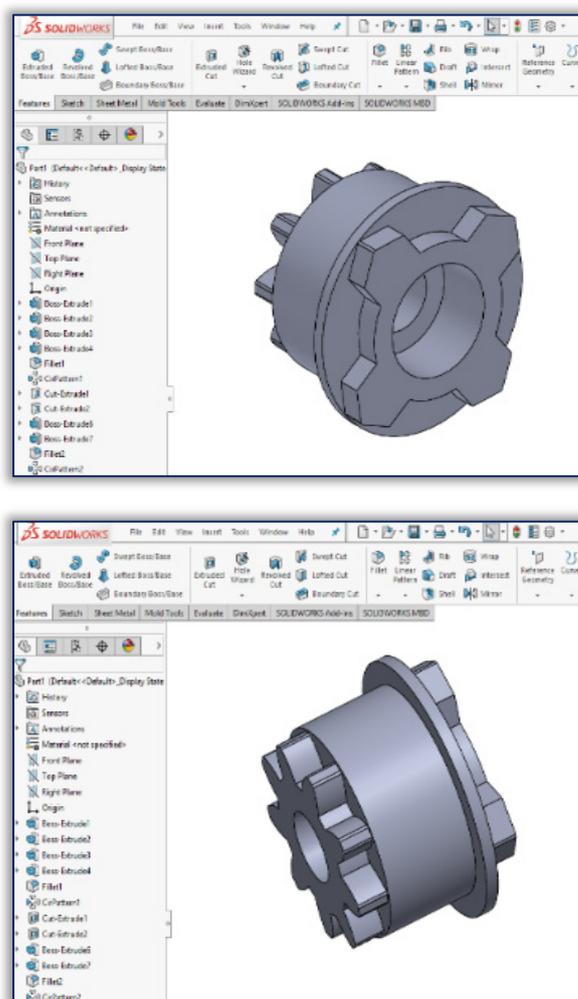


Figure 1. A gear model in Solid Works software package

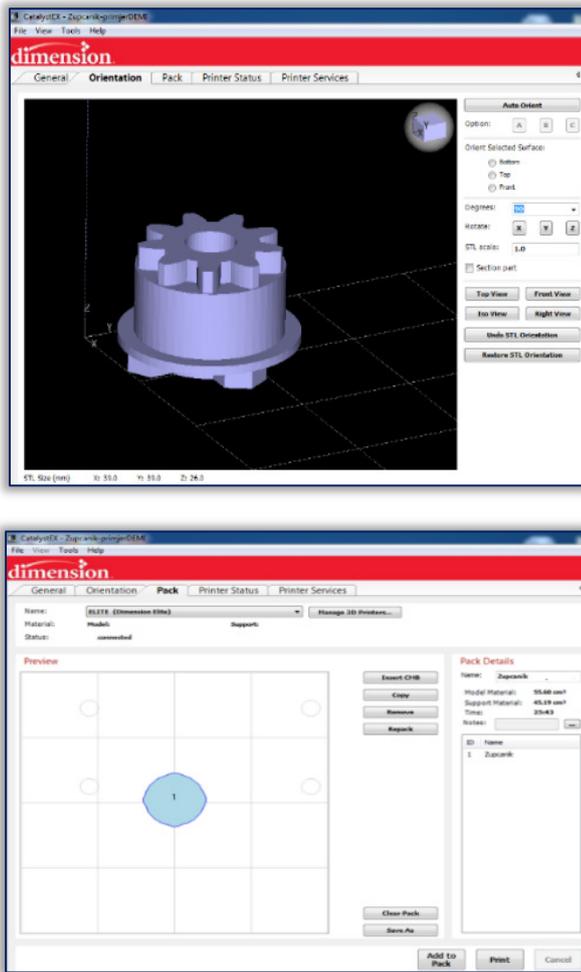


Figure 2. Orientation and processing of models in CatalystEX
VACUUM CASTING TECHNOLOGY AND ITS ROLE IN THE INTEGRATED PROCESS

Vacuum casting has become a widely accepted method of soft tooling, replacing traditional methods such as investment casting [4]. Vacuum casting is a newer version of investment casting with changes to the process of creating the mold. Several needs are addressed by vacuum casting which make it extremely popular.

Most importantly, vacuum casting reduces the time for part production when compared to traditional methods. This, in turn, significantly reduces costs.

The additional following characteristics offered by vacuum casting justify the choice of this technology for the integrated process:

- 1) Accurate Castings: Textures, fine details, and complex surfaces are exactly reproduced from the master model due to the replicating nature of the silicone rubber mold.
- 2) Consistent Quality: Vacuum casting produces dimensionally stable and accurate castings. The technique allows castings of thin wall and void-free sections as well. Furthermore, vacuum casting in silicone molds allows producing parts with undercuts because the pliable silicone molds do not present problems when removing cast parts, even with undercuts, from the mold.


- 3) Up to 95% Saving in Time: After the silicone mold has been created, replicas of the master model may be fabricated within a few hours, depending on the number of parts required.
- 4) Fit and Function Testing: The cast parts are sufficiently accurate so that fit and function testing may be conducted to determine which modifications must be made.
- 5) Cost Savings: Using vacuum casting offers reductions in cost when compared to rapid prototyping or traditional hard tooling.
- 6) Material Choices: Vacuum casting resins simulate production thermoplastics, rubber, and glass. Additionally, the resins sustain high impact and resist elevated temperatures. With vacuum casting, users have the options to create clear or colored parts as well.

The process of vacuum casting consists of the following steps:

1. Preparation of gear negatives produced on a 3D printer for the casting process. Setting the parting tape on the gear negative that will facilitate the separation of silicone mold.
2. Bonding plastic gates on the gear negative which has a role to form an inlet channel in the silicone mold and to facilitate the positioning and fixation of the negative in the silicone casting frame, according to Figure 3a.



a)

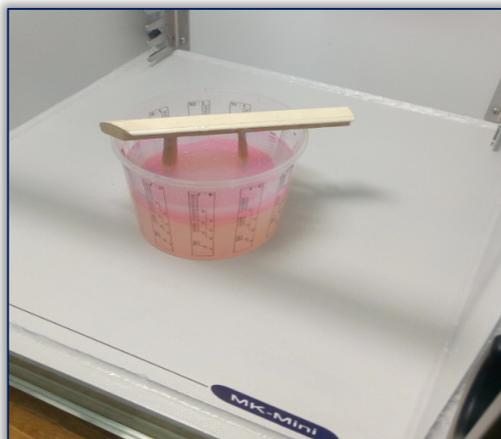

b)

Figure 3 a) Casting silicone into the frame with the negative, and b) removing the residual air from the silicon in a vacuum chamber

3. Calculation of the necessary quantity of silicone mixture to form a silicone mold to be used for molding the gear. The silicone mixture is poured into the frame with fixed gear negatives and then the frame with the negative submerged in silicone is placed in a vacuum chamber in order to remove the residual air bubbles from silicon, according to Figure 3b.
4. Positioning of the silicone mold in a vacuum chamber (Figure 3a.). After solidification of silicone, silicone mold is cut to parting line, during which we relieve the negative and get a silicone mold for casting a replica of a given negative (Figure 3b).
5. The molding halves are then combined and the next step is to calculate necessary quantities of resin for molding of the gear. The amount of resin is commonly determined by weighing the individual master model which is increased by 20-30%, taking into account the loss of material in vessels and inlet channels.

Table 1. Mechanical characteristics of components used for casting of the gear

MECHANICAL PROPERTIES AT 23°C			
Flexural modulus of elasticity	ISO 178 :2001	MPa	2.300
Flexural strength	ISO 178 :2001	MPa	80
Tensile strength	ISO 527 :1993	MPa	60
Elongation at break in tension	ISO 527 :1993	%	11
Charpy impact resistance	ISO 179/2D :1994	kJ/m ²	> 60
Hardness at 23°C	ISO 868 :1985	Shore D1	80
Hardness at 120°C	ISO 868 :1985	Shore D1	> 65

In this case, to cast the gear, components made by Axson Technologies were used, thus by mixing them in the casting process the parts with physical and mechanical characteristics according to Table 1 are obtained.

6. After a certain quantity of the material needed for molding and the proportion of the individual components of the material in a total amount are determined, then vacuum casting process follows. The casting process takes place in a vacuum chamber under conditions that are recommended for corresponding elements and components of the material, according to Figure 6.
7. After solidification of the molded material in a vacuum chamber, mold halves are separated and, if necessary, post-processing of the molded item follows.

Small batches of gears, made in the integrated process of additive manufacturing technology and vacuum casting in the Laboratory for Plasticity and Processing Systems at the Faculty of Mechanical Engineering in Banja Luka as a result of this study are shown in Figure 7.



Figure 6. The casting process in a vacuum chamber MK-mini



Figure 7. Small batches of gears made in the integrated process of additive manufacturing technology and vacuum casting

CONCLUSIONS

The development of a gear case study through the integration process of 3D printing and vacuum casting shows an example of a very successful application of modern technology in the rapid development of functional parts and production replicas of identical part.

Replicas can be made from different materials that can be very broad spectrum in terms of physical, technical and mechanical properties. Replicas fully meet the requirements in terms of dimensional accuracy and functionality, i.e. all the

details from the master model have been faithfully reproduced on its replicas.

This only confirms the importance and benefits that is provided by the integration of 3D printing and vacuum casting technologies in the rapid development and production of small series of prototypes and functional parts.

Acknowledgment

This investigation on the application of advanced technologies for sustainable Additive manufacturing methods and technologies has been realized as part of Tempus WIMB No. 543898 project implementation, a project co-funded by the European Union.

Note

This paper is based on the paper presented at 13th International Conference on Accomplishments in Mechanical and Industrial Engineering – DEMI 2017, organized by University of Banja Luka, Faculty of Mechanical Engineering, in Banja Luka, BOSNIA & HERZEGOVINA, 26 - 27 May 2017.

References

- [1] ASTM F2792-12a: Standard Terminology for Additive Manufacturing Technologies
- [2] Sljivić M., Pavlović A., Ilić J., Stanojević M., Todorović S. (2017): Comparing the Accuracy of Professional and Consumer Grade 3D Printers in Complex Models Production, FME Transactions, Vol.45, No.3, pp. 348-353
- [3] Wohlers Report 2014: 3D Printing and Additive Manufacturing, State of the Industry, Annual Worldwide Progress Report, WOHLERS ASSOCIATES, INC. Colorado 80525, USA.
- [4] Grenda E.: Printing the future, The 3D printing and rapid prototyping source book, Third Edition, CASTLE ISLAND CO. ARLINGTON, MA 02474, USA
- [5] Pavlovic A., Šljivić M., Kraišnik M., Ilić J., Anić J. (2017): Polymers in Additive Manufacturing: the Case of a Water Pump Impeller, FME Transactions, Vol.45, No.3, pp. 354-359, doi:10.5937/fmet1703354P
- [6] Despeisse M., Ford S. (2015): The Role of Additive Manufacturing in Improving Resource Efficiency and Sustainability, Institute for Manufacturing, University of Cambridge, UK, No.3, ISSN 2058-8887
- [7] Jacobus Dippenaar D., Schreve K. (2012): 3D printed tooling for vacuum assisted resin transfer moulding, The International Journal of Advanced Manufacturing Technology,



ISSN: 2067-3809

copyright © University POLITEHNICA Timisoara,
Faculty of Engineering Hunedoara,
5, Revolutiei, 331128, Hunedoara, ROMANIA
<http://acta.fih.upt.ro>